

Fiber indoor/outdoor cable, LazrSPEED®, Single Jacket/Single Armor, Low Smoke Zero Halogen (LSZH), 6 fiber, Multimode OM4, Gel-Free, Stranded Loose Tube, Black jacket color, Feet jacket marking

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection

## Product Classification

|                       |                                                                     |
|-----------------------|---------------------------------------------------------------------|
| Regional Availability | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| Portfolio             | CommScope®                                                          |
| Product Type          | Fiber indoor/outdoor cable                                          |
| Product Series        | Z-LA                                                                |


## General Specifications

|                              |                     |
|------------------------------|---------------------|
| Armor Type                   | Corrugated steel    |
| Cable Type                   | Stranded loose tube |
| Construction Type            | Armored             |
| Subunit Type                 | Gel-free            |
| Filler, quantity             | 4                   |
| Jacket Color                 | Black               |
| Jacket Marking               | Feet                |
| Subunit, quantity            | 1                   |
| Fibers per Subunit, quantity | 6                   |
| Total Fiber Count            | 6                   |

## Dimensions

|                              |                   |
|------------------------------|-------------------|
| Buffer Tube/Subunit Diameter | 2.5 mm   0.098 in |
| Diameter Over Jacket         | 13 mm   0.512 in  |

## Representative Image

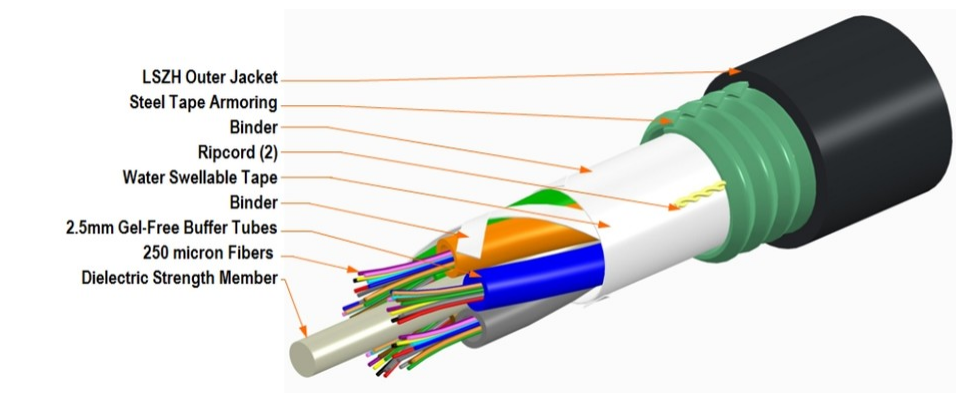

Mechanical Specifications

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Minimum Bend Radius, loaded       | 195 mm   7.677 in                     |
| Minimum Bend Radius, unloaded     | 130 mm   5.118 in                     |
| Tensile Load, long term, maximum  | 800 N   179.847 lbf                   |
| Tensile Load, short term, maximum | 2700 N   606.984 lbf                  |
| Compression                       | 22 N/mm   125.623 lb/in               |
| Compression Test Method           | FOTP-41   IEC 60794-1 E3              |
| Flex                              | 25 cycles                             |
| Flex Test Method                  | FOTP-104   IEC 60794-1 E6             |
| Impact                            | 3 N-m   26.552 in lb                  |
| Impact Test Method                | FOTP-25   IEC 60794-1 E4              |
| Strain                            | See long and short term tensile loads |
| Strain Test Method                | FOTP-33   IEC 60794-1 E1              |
| Twist                             | 10 cycles                             |
| Twist Test Method                 | FOTP-85   IEC 60794-1 E7              |
| Vertical Rise, maximum            | 461 m   1,512.467 ft                  |

Optical Specifications

|            |                                           |
|------------|-------------------------------------------|
| Fiber Type | OM4, LazrSPEED® 550   OM4, LazrSPEED® 550 |
|------------|-------------------------------------------|

Environmental Specifications

|                          |                                      |
|--------------------------|--------------------------------------|
| Installation temperature | -30 °C to +60 °C (-22 °F to +140 °F) |
| Operating Temperature    | -40 °C to +70 °C (-40 °F to +158 °F) |

# 760239012 | Z-006-LA-5K-F06BK/25D

|                               |                                                                      |
|-------------------------------|----------------------------------------------------------------------|
| Storage Temperature           | -40 °C to +75 °C (-40 °F to +167 °F)                                 |
| Cable Qualification Standards | ANSI/ICEA S-104-696   EN 187105   Telcordia GR-20   Telcordia GR-409 |
| Environmental Space           | Aerial, lashed   Buried   Low Smoke Zero Halogen (LSZH)              |
| Flame Test Listing            | NEC OFC-ST1 (ETL) and c(ETL)                                         |
| Flame Test Method             | IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 1202   UL 1685        |
| Jacket UV Resistance          | UV stabilized                                                        |
| Water Penetration             | 24 h                                                                 |
| Water Penetration Test Method | FOTP-82   IEC 60794-1 F5                                             |

## Environmental Test Specifications

|                               |                                      |
|-------------------------------|--------------------------------------|
| Cable Freeze                  | -2 °C   28.4 °F                      |
| Cable Freeze Test Method      | FOTP-98   IEC 60794-1 F15            |
| Heat Age                      | -40 °C to +85 °C (-40 °F to +185 °F) |
| Heat Age Test Method          | IEC 60794-1 F9                       |
| Low High Bend                 | -30 °C to +60 °C (-22 °F to +140 °F) |
| Low High Bend Test Method     | FOTP-37   IEC 60794-1 E11            |
| Temperature Cycle             | -40 °C to +70 °C (-40 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3   IEC 60794-1 F1              |

## Packaging and Weights

|              |                            |
|--------------|----------------------------|
| Cable weight | 177 kg/km   118.939 lb/kft |
|--------------|----------------------------|

## Regulatory Compliance/Certifications

| Agency        | Classification                                                                 |
|---------------|--------------------------------------------------------------------------------|
| CENELEC       | EN 50575 compliant, Declaration of Performance (DoP) available                 |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |



## Included Products

|          |                                                       |
|----------|-------------------------------------------------------|
| CS-5K-LT | – LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber |
|----------|-------------------------------------------------------|

## \* Footnotes

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| Operating Temperature | Specification applicable to non-terminated bulk fiber cable |
|-----------------------|-------------------------------------------------------------|

## LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber

### LazrSPEED® 550

#### Product Classification

|              |               |
|--------------|---------------|
| Portfolio    | CommScope®    |
| Product Type | Optical fiber |

#### General Specifications

|                                               |                            |
|-----------------------------------------------|----------------------------|
| Cladding Diameter                             | 125 µm                     |
| Cladding Diameter Tolerance                   | ±0.8 µm                    |
| Cladding Non-Circularity, maximum             | 1 %                        |
| Coating Diameter (Colored)                    | 254 µm                     |
| Coating Diameter (Uncolored)                  | 245 µm                     |
| Coating Diameter Tolerance (Colored)          | ±7 µm                      |
| Coating Diameter Tolerance (Uncolored)        | ±10 µm                     |
| Coating/Cladding Concentricity Error, maximum | 12 µm                      |
| Core Diameter                                 | 50 µm                      |
| Core Diameter Tolerance                       | ±2.5 µm                    |
| Core/Clad Offset, maximum                     | 1.5 µm                     |
| Proof Test                                    | 689.476 N/mm²   100000 psi |

#### Mechanical Specifications

|                                          |                                       |
|------------------------------------------|---------------------------------------|
| Macrobending, 15 mm Ø mandrel, 2 turns   | 0.20 dB @ 850 nm   0.50 dB @ 1,300 nm |
| Macrobending, 30 mm Ø mandrel, 2 turns   | 0.10 dB @ 850 nm   0.30 dB @ 1,300 nm |
| Macrobending, 75 mm Ø mandrel, 100 turns | 0.50 dB @ 1,300 nm   0.50 dB @ 850 nm |
| Coating Strip Force, maximum             | 8.9 N   2.001 lbf                     |
| Coating Strip Force, minimum             | 1.3 N   0.292 lbf                     |
| Dynamic Fatigue Parameter, minimum       | 18                                    |

# CS-5K-LT

## Optical Specifications

|                                     |                     |
|-------------------------------------|---------------------|
| Numerical Aperture                  | 0.2                 |
| Numerical Aperture Tolerance        | ±0.015              |
| Point Defects, maximum              | 0.15 dB             |
| Zero Dispersion Slope, maximum      | 0.105 ps/[km-nm-nm] |
| Zero Dispersion Wavelength, maximum | 1316 nm             |
| Zero Dispersion Wavelength, minimum | 1297 nm             |

## Optical Specifications, Wavelength Specific

|                              |                                                                               |
|------------------------------|-------------------------------------------------------------------------------|
| 1 Gbps Ethernet Distance     | 1,110 m @ 850 nm   600 m @ 1,300 nm                                           |
| 10 Gbps Ethernet Distance    | 550 m @ 850 nm                                                                |
| Attenuation, maximum         | 1.00 dB/km @ 1,300 nm   3.00 dB/km @ 850 nm                                   |
| Backscatter Coefficient      | -68.0 dB @ 850 nm   -75.7 dB @ 1,300 nm                                       |
| Bandwidth, Laser, minimum    | 4,700 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm                                 |
| Bandwidth, OFL, minimum      | 3,500 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm                                 |
| Differential Mode Delay      | 0.70 ps/m @ 850 nm   0.88 ps/m @ 1,300 nm                                     |
| Differential Mode Delay Note | Superior to TIA-492AAAC and IEC 60793-2-10 at 850 nm                          |
| Index of Refraction          | 1.479 @ 1,300 nm   1.483 @ 850 nm                                             |
| Standards Compliance         | IEC 60793-2-10, type A1a.3a   IEC 60793-2-10, type A1a.3b   TIA-492AAAD (OM4) |

## Environmental Specifications

|                                       |                    |
|---------------------------------------|--------------------|
| Heat Aging, maximum                   | 0.20 dB/km @ 85 °C |
| Temperature Dependence, maximum       | 0.1 dB/km          |
| Temperature Humidity Cycling, maximum | 0.2 dB/km          |
| Water Immersion, maximum              | 0.20 dB/km @ 23 °C |

## Regulatory Compliance/Certifications

| Agency        | Classification                                                                 |
|---------------|--------------------------------------------------------------------------------|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

## \* Footnotes

|                                 |                                                                             |
|---------------------------------|-----------------------------------------------------------------------------|
| Temperature Dependence, maximum | Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F) |
|---------------------------------|-----------------------------------------------------------------------------|

# CS-5K-LT

---

**Temperature Humidity Cycling, maximum** Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity