


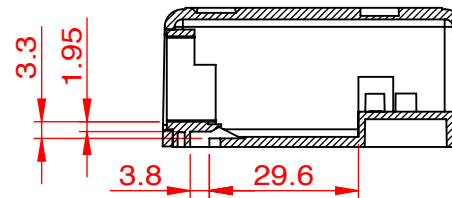
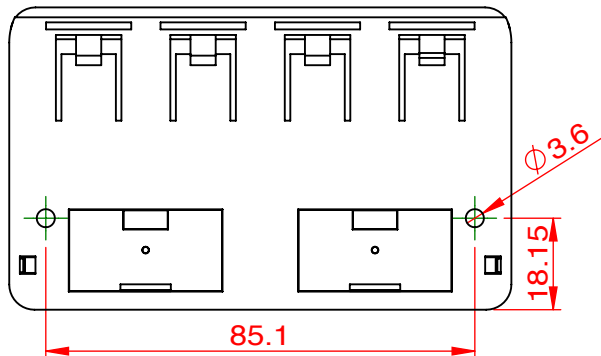


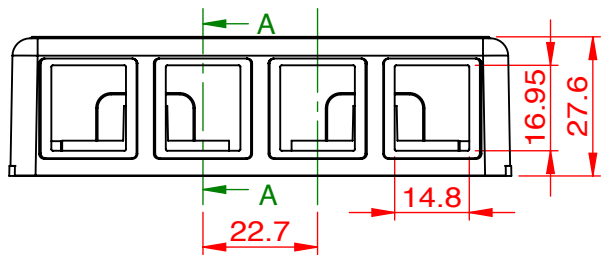

Structured Cable Products
Quality Installations Deserve Quality Products

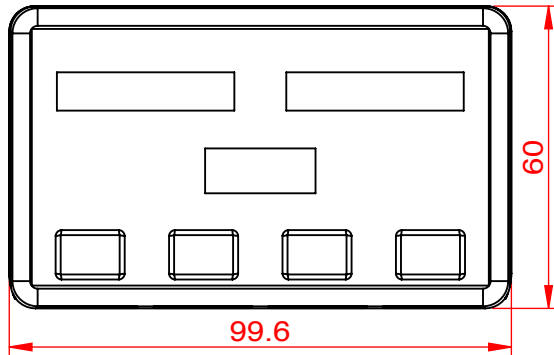

SECTION A-A
SCALE 2 : 3

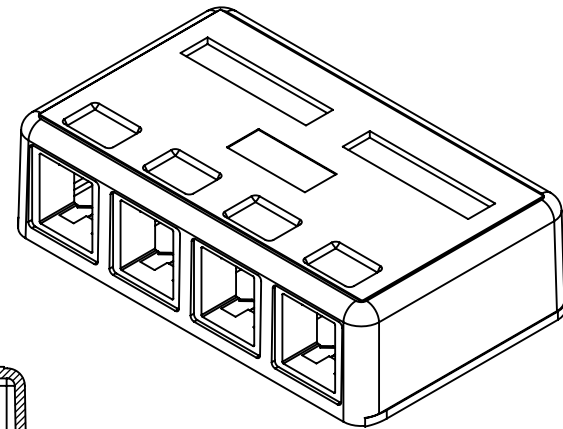

ACCORDING TO : ANSI/TIA-568-C.2
ISO/IEC 11801 2nd Edition
IEC 60603-7

ENCLOSURE
NYLON CABLE TIE X 2 PCS
SCREW X 2 PCS
TWIN ADHESIVE X 2 PCS

56Y4
E145249



MATERIAL

HOUSING : ABS,UL94V-0.
SCREW : SLOTTED PHILIPS CROSS RECESSED BINDING HEAD 3.5 X 20MM SELF TAPING NICKEL PLATED.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10%~90%RH.

Scale		2:3			REV DATE 9/27/2013 JENNIFER	
3rd Angle Projection					SCP PART #	
Unit		mm			214-WT	
Date		2012/12/25			Drawn by	
Tolerance					Checked by	
~20	~50	~150	150~	ANGLE	BORUEI	
±0.2	±0.4	±0.5	±1.5	±2°		