


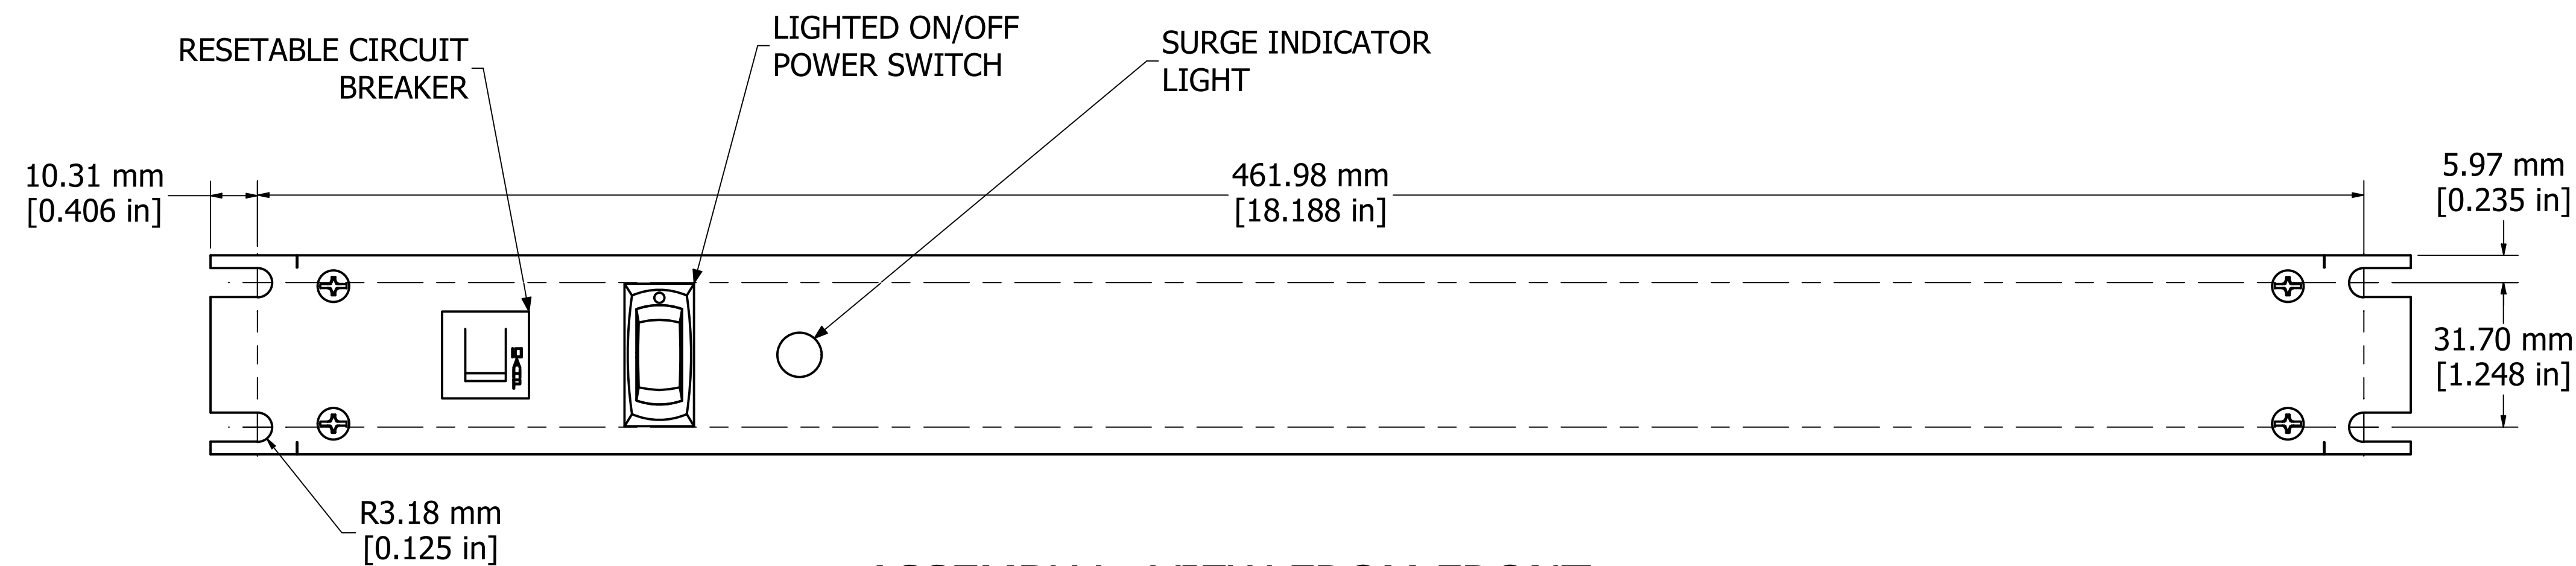


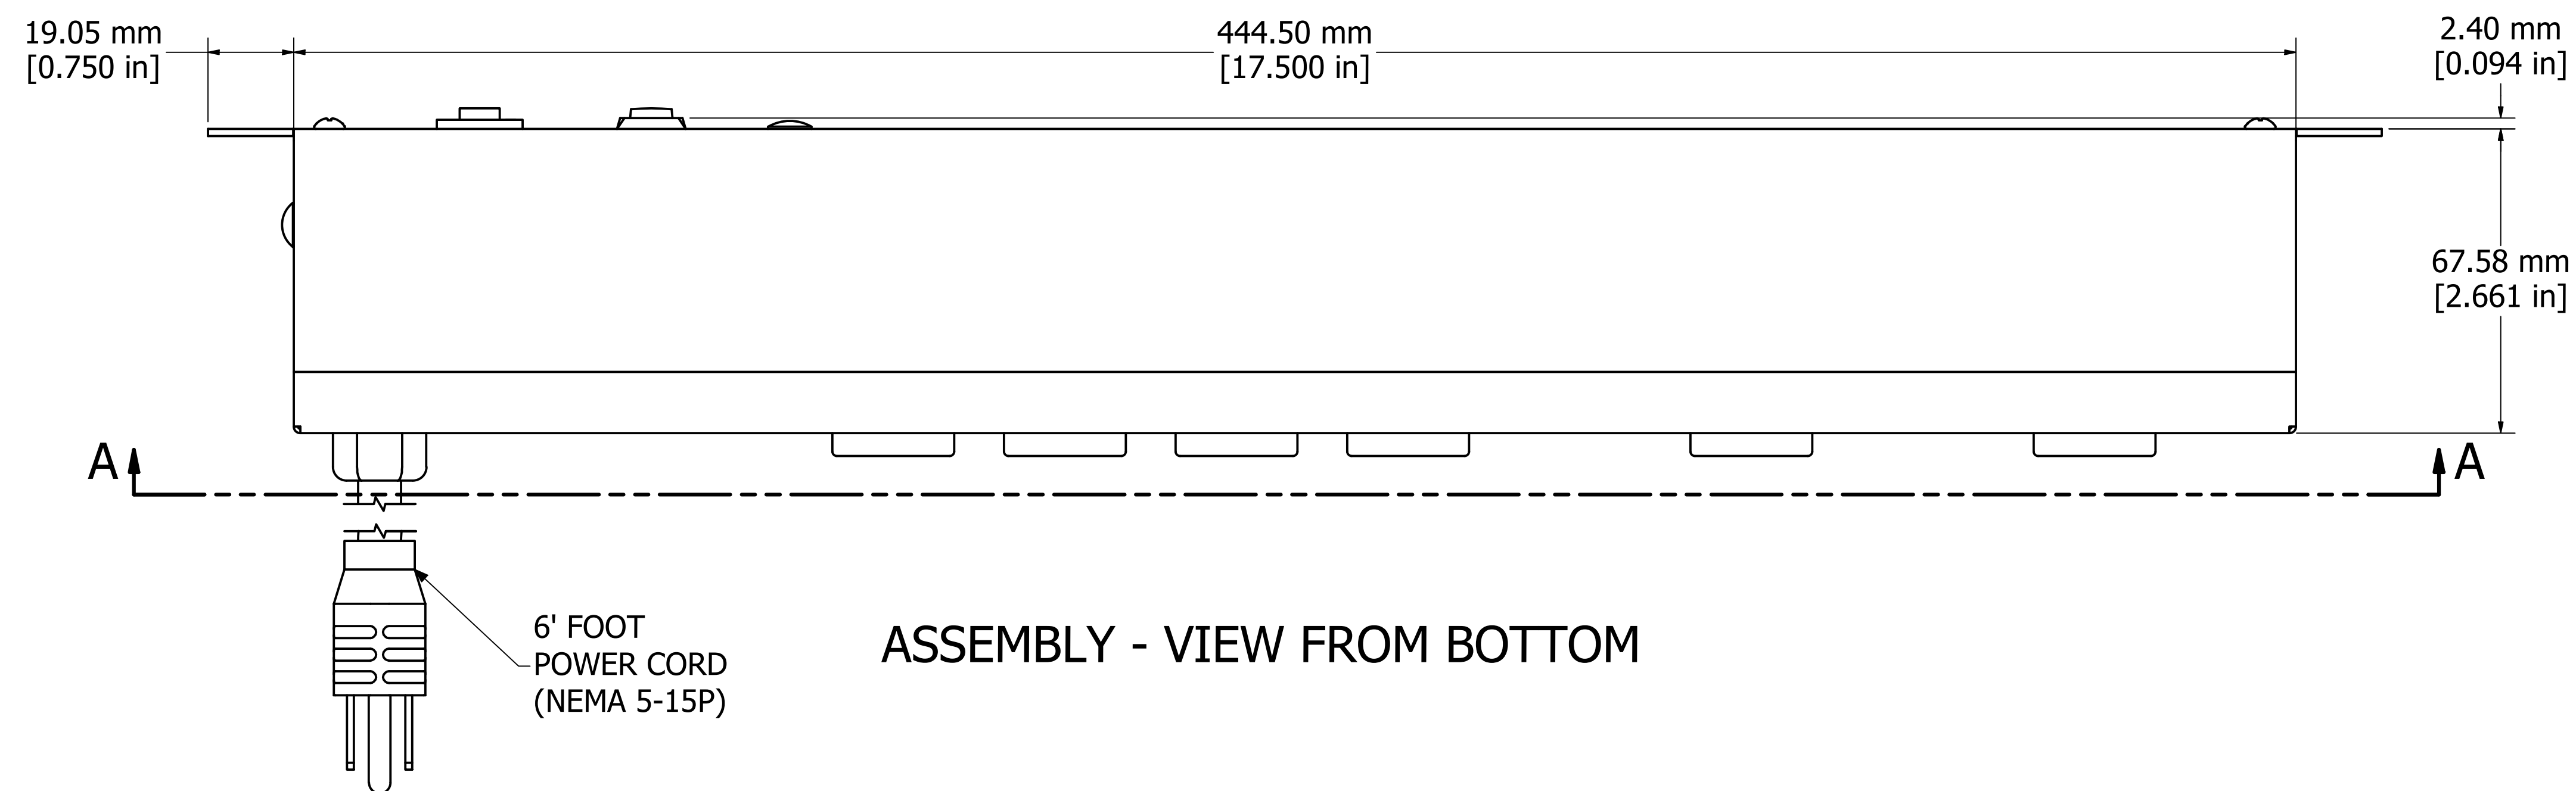


ASSEMBLY - VIEW FROM FRONT

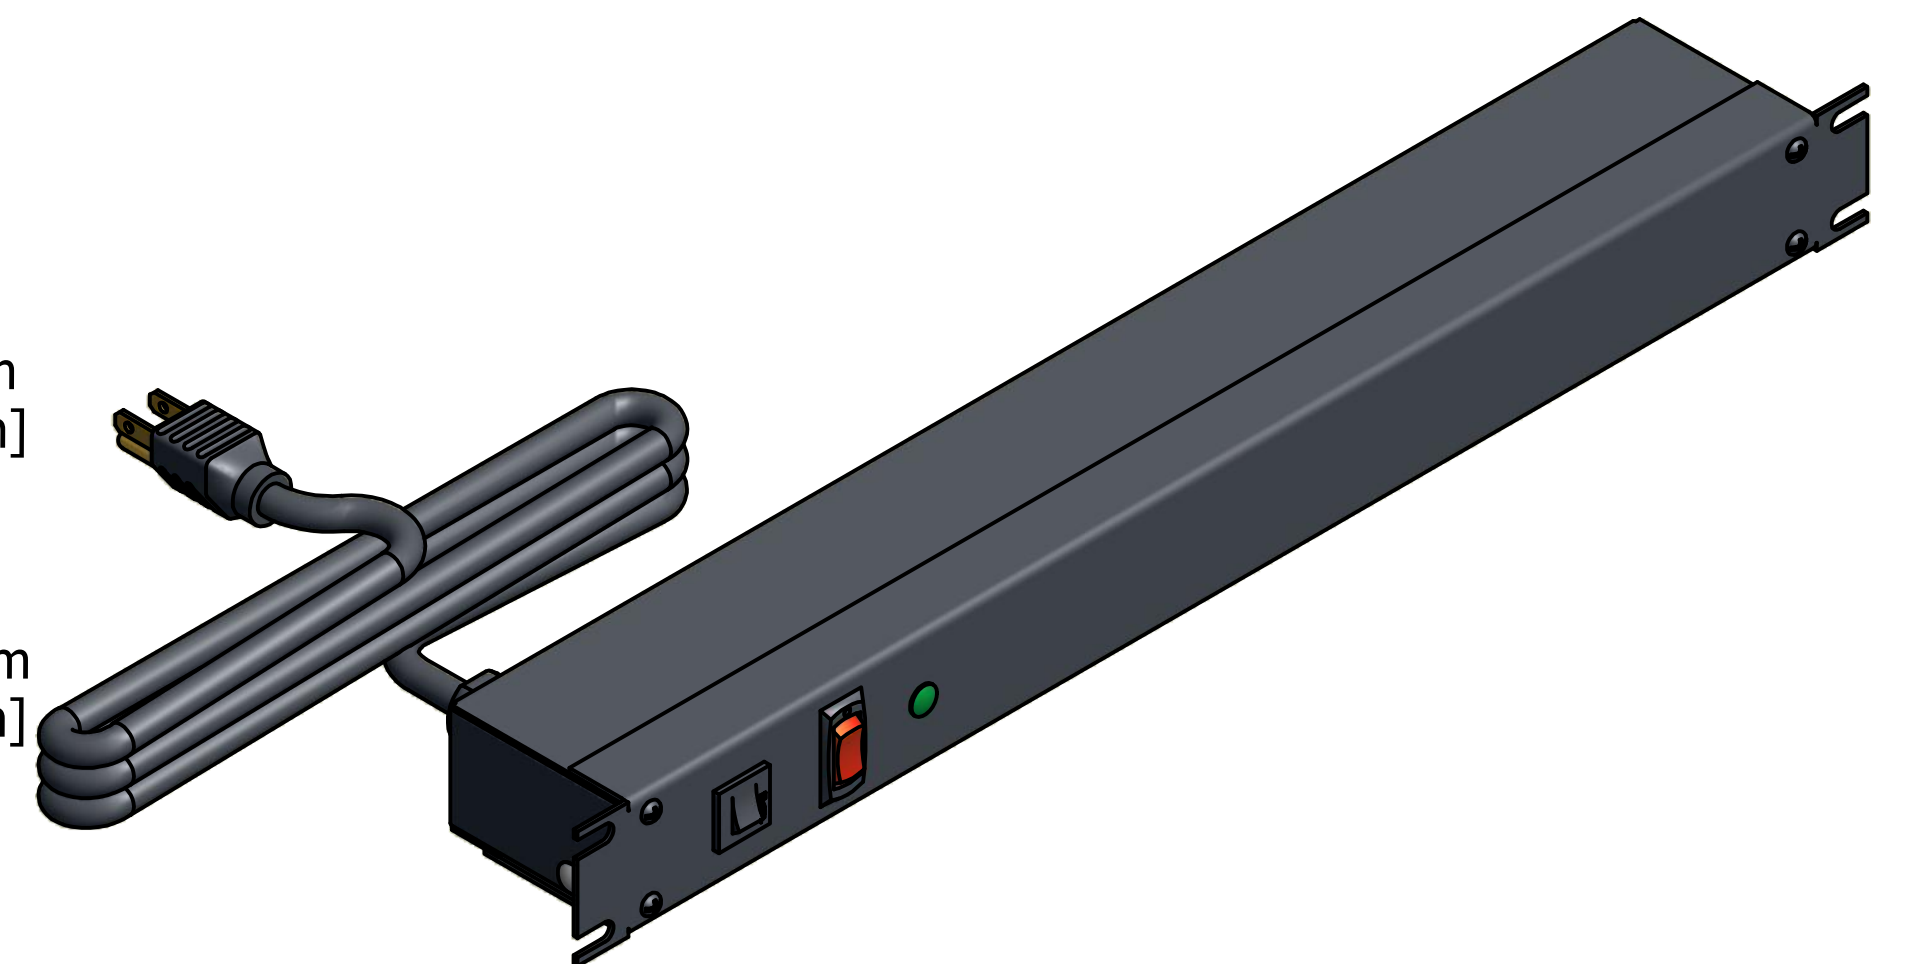

ASSEMBLY - VIEW FROM BOTTOM

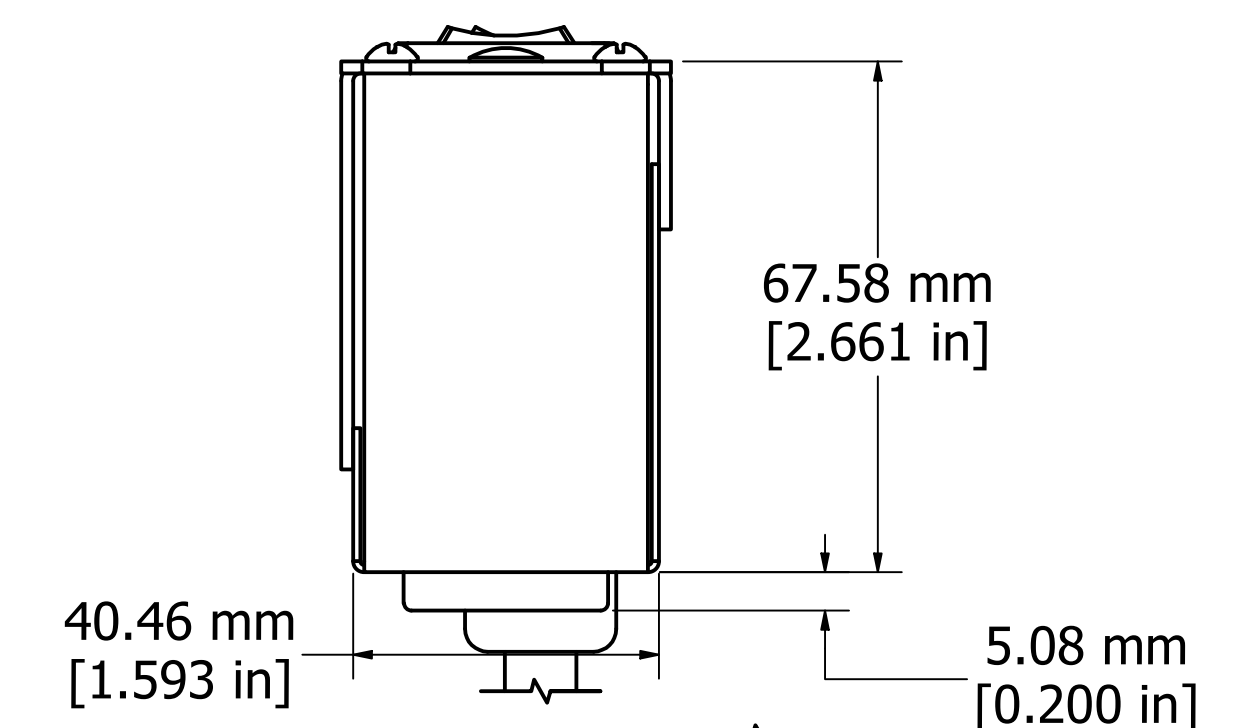

ASSEMBLY - VIEW FROM SIDE

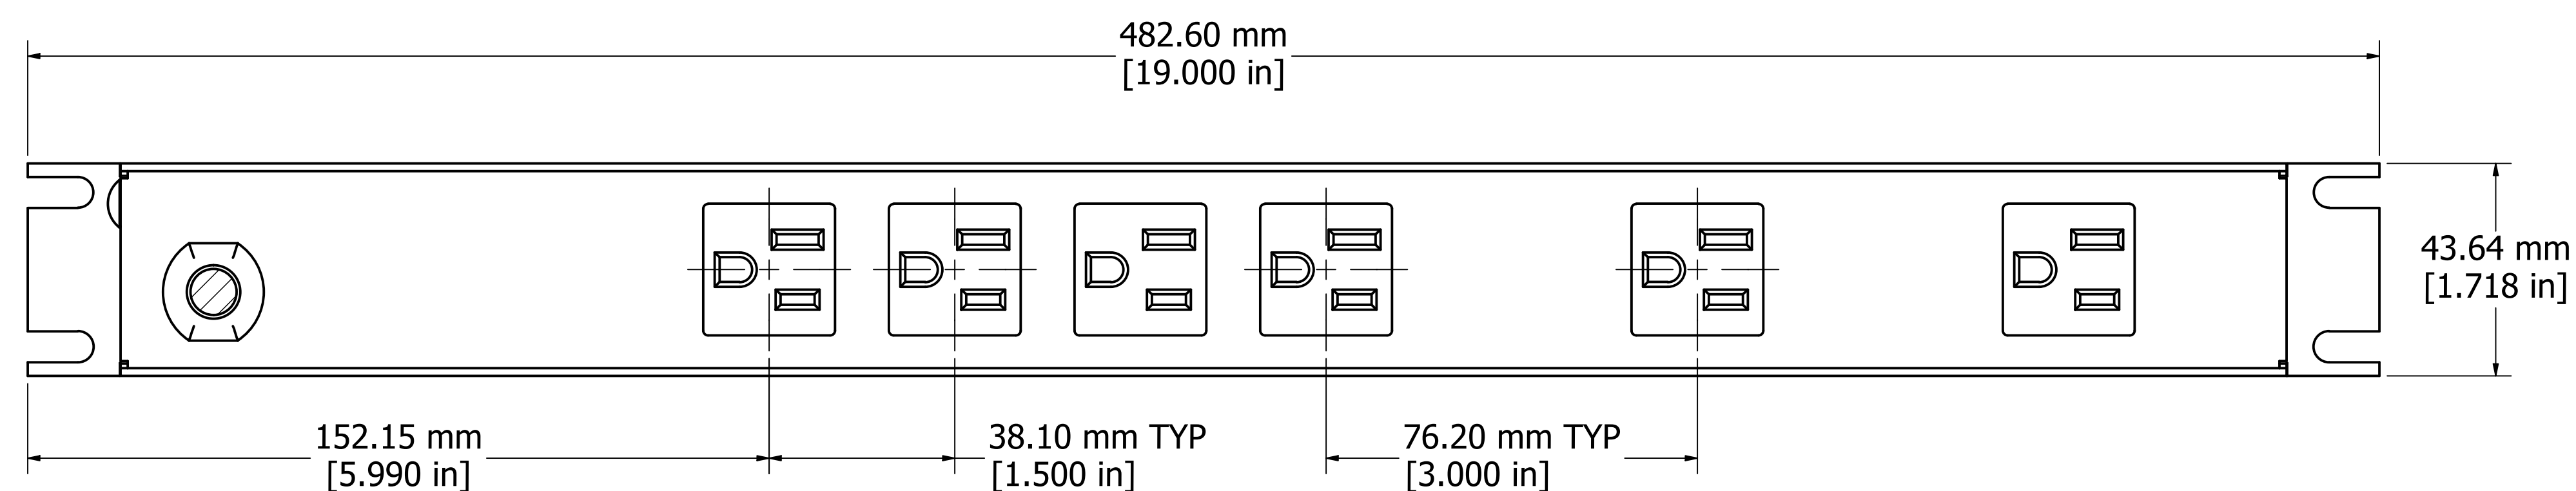

1583H6A1SBK

Finish - Front - Black Painted Steel

Back - Black Painted Steel

Rated - 125 VAC, 60 Hz, 15 Amps

Approvals - cURus Recognized to: UL1449 & C22.2 No. 269.3-17

Surge Specs - 1080 Joules, 75000 Amps Transient Current

- 500V Voltage Protection Rating (VPR)



HAMMOND
MANUFACTURING™

1583H6A1SBK

www.hammondmfg.com