



Unloaded High-Density Multimedia Patch Panels

KEY FEATURES

- 24- and 48-port sizes
- Straight and angled design options
- Field configurable – a wide range of connector modules can be installed in various combinations
- Unscreened and screened options
- Maximum strength and durability construction
- Optional snap-in rear cable management bars
- CEA-310-E 19-in rack mounting standard
- Compatibility:
 - unscreened and screened twisted-pair modules:
 - 24U-HDMMP
 - 24U-HDMMP-A
 - 48U-HDMMP
 - 48U-HDMMP-A
 - unscreened twisted-pair modules:
 - 48U-HDMMP-1R

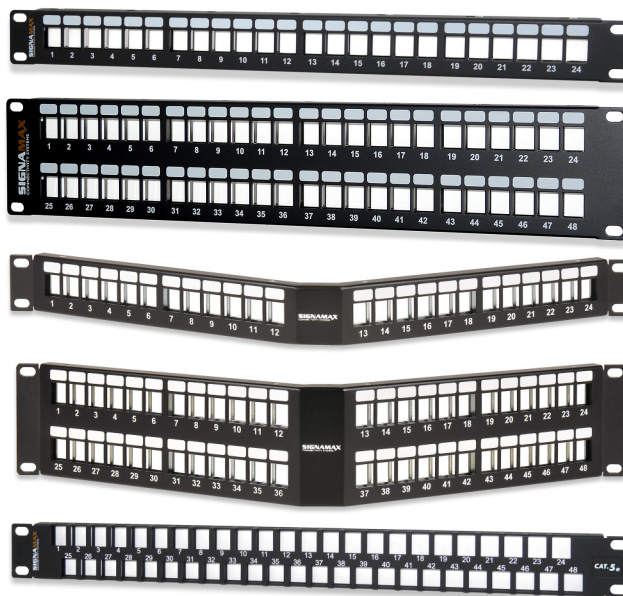

Standard keystone mounting openings allow installation of unscreened and screened twisted-pair modules as well as a variety of other multimedia jacks

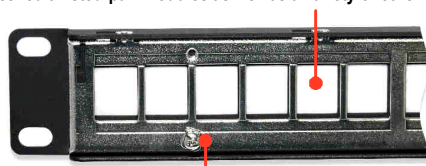

A grounding lug is located on the rear frame for attaching a 6-AWG (4.5-mm) grounding conductor and/or bonding two panels



An optional cable management bar mounts easily (snaps in) to the back of the panel

ORDERING INFORMATION

Unloaded High Density Multimedia Patch Panels

Part Number	Description	
24U-HDMMP	24-Port Field-Configurable Unloaded Patch Panel,	1.75" (1-RMS) High
24U-HDMMP-A	24-Port Angled Field-Configurable Unloaded Patch Panel,	1.75" (1-RMS) High
48U-HDMMP	48-Port Field-Configurable Unloaded Patch Panel,	3.0" (2-RMS) High
48U-HDMMP-A	48-Port Angled Field-Configurable Unloaded Patch Panel,	3.0" (2-RMS) High
48U-HDMMP-1R*	48-Port High-Density Field-Configurable Unloaded Panel,	1.75" (1-RMS) High

*48U-HDMMP-1R is not compatible with category 6A twisted-pair modules and is not equipped with the grounding option.

SPECIFICATIONS

• CONSTRUCTION

24U-HDMMP, 48U-HDMMP:
SAE 1010 steel/Ni plated
24U-HDMMP-A, 48U-HDMMP-A:
SAE 1010 steel/anodized
48U-HDMMP-1R:
SAE 1010 steel

• DIMENSIONS

19-in CEA-310-E rack mounting standard:
24U-HDMMP, 24U-HDMMP-A, 48U-HDMMP-1R:
H 1.75" (1 RMU)
48U-HDMMP, 48U-HDMMP-A:
H 3.0" (2 RMS)

• COMPLIANCE

CEA-310-E

• OPERATING TEMPERATURE

-14°F – 140°F (-10°C – +60°C)