


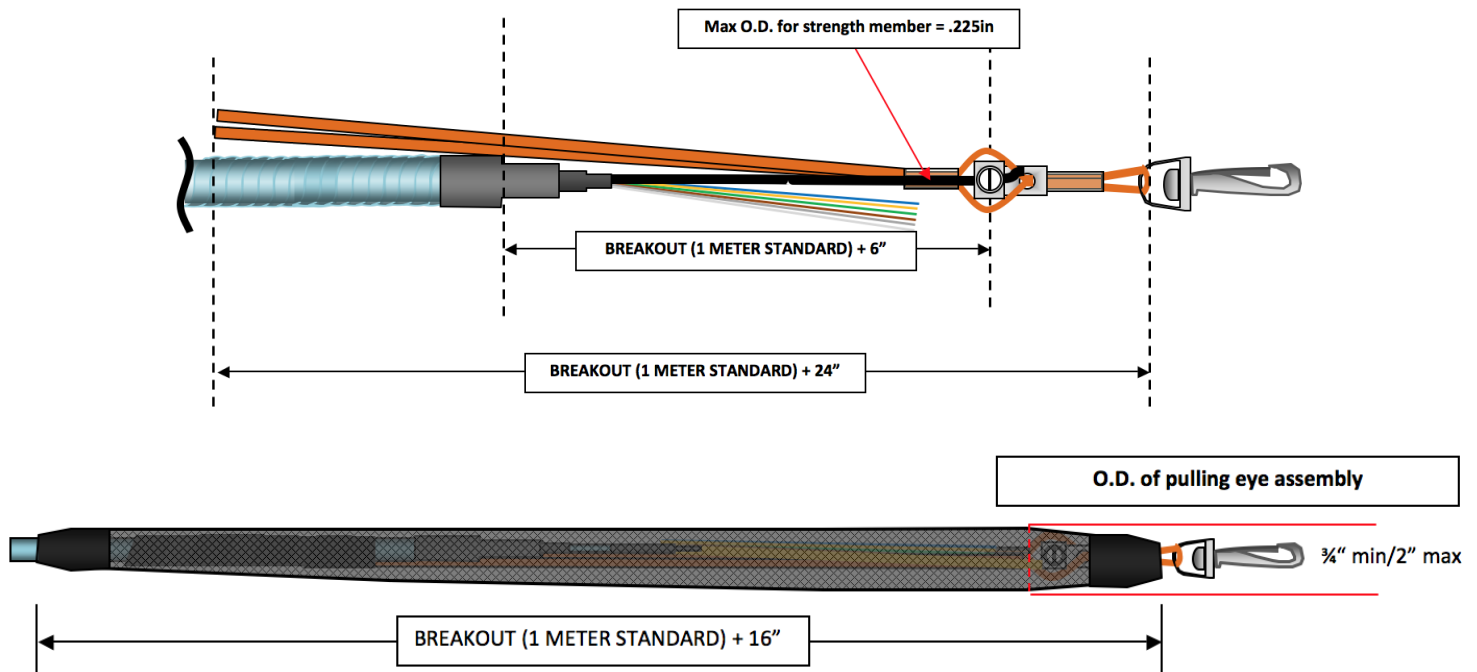

The FIS pulling eye will protect connectors while providing a pulling point with properly distributed tensions on cable assemblies. Available as a stand-alone component or installed by FIS on your custom cable assembly. The pulling eye has a rotating end clip to minimize cable twisting and the connectors are protected with cable netting.

SPECIFICATIONS

	<i>F1-1001 (Multi Fiber)</i>	<i>F1-1001BR (Simplex/Duplex)</i>
Maximum Pulling Load	2000 Newtons (500 lbs.)	550 Newtons (124 lbs.)
Length	1.5 Meters	0.5 Meters
Minimum Bend Radius	4 cm (pulling eye only)	4 cm (pulling eye only)
Eyelet	Stainless Steel	Stainless Steel
Lock Nut	Aluminum	N/A
Strength member	PVC jacketed Kevlar	PVC jacketed Kevlar

ORDERING INFORMATION

F1-1001	FIS Pulling Eye Kit for Multifibers Yellow
F1-1001BR	FIS Pulling Eye Kit for Multifibers Orange